



### 特点 Features:

- 触点容量: 10A触点切换能力  
Contact switching capability: 10A.
- 可提供符合 IEC 60335-1 要求的产品  
Product comply with IEC 60335-1 available.
- 线圈与触点浪涌电压6KV  
6KV surge voltage between coil and contact.

### 触点参数 CONTACT DATA

型 号	Model	YX301
触点形式	Contact Arrangement	1A、1B、1C
接触电阻	Contact Resistance	100mΩ Max.
触点材料	Contact Material	银合金 Silver Alloy
额定负载(阻性)	Contact Rating ( Res.Load )	10A 250VAC ; 5A 250VAC
最大切换电流	Max. Switching Current	10A
最大切换电压	Max. Switching Voltage	277VAC/30VDC
最大切换功率	Max. Switching Power	2500VA/150W
机械寿命	Mechanical endurance	1x10 <sup>7</sup> 次 OPS
电气寿命	Electrical endurance	1x10 <sup>5</sup> 次 OPS

### 性能参数 CHARACTERISTICS

吸合时间(额定电压下)	Operate Time ( at nomi.volt. )	10ms Max.
释放时间(不带二极管)	Release Time ( without diode )	5ms Max.
绝缘电阻	Insulation Resistance	1000MΩ Min. ( 500VDC )
介质耐压	Dielectric Strength	触点与触点间 Between Open Contacts : 1,000VAC, 50/60Hz 1 min. 触点与线圈间 Between Coil & Contacts: 4,000VAC, 50/60Hz 1 min.
抗振性	Vibration resistance	误动作 Functional: 10~55Hz 双振幅 1.5mm ( DA ) 耐久 Destructive: 10~55Hz 双振幅 1.5mm ( DA )
抗冲击	Shock resistance	误动作 Functional: 10G Min. 耐久 Destructive: 100G Min.
环境温度	Ambient Temperature	-40°C~+105°C ( 不冷凝 No condensation)
重量	Unit Weight	约 Approx. 6.5g

### 线圈参数 COIL DATA (at 23°C)

额定电压 Rated voltage (VDC)	额定电流 Rated current ±10% (mA)	线圈电阻 Coil resistance ±10% (Ω)	最大连续外加电压 Max allowable voltage VDC (Max.)	吸合电压 Operate voltage VDC (Max.)	释放电压 Release voltage VDC (Min.)	额定功率 Rated coil power (W)
3	66.7	45	额定电压的 of rated voltage 130 %	额定电压的 of rated voltage 75 %	额定电压的 of rated voltage 5 %	约 approx. 0.2
5	40.0	125				
6	33.3	180				
9	22.2	405				
12	16.7	720				
15	13.3	1,125				
18	11.1	1,620				
24	8.3	2,880				
36	5.6	6,480				
48	4.2	11,520				

**线圈参数 COIL DATA (at 23°C)**

额定电压 Rated voltage (VDC)	额定电流 Rated current $\pm 10\%$ (mA)	线圈电阻 Coil resistance $\pm 10\%$ (Ω)	最大连续外加电压 Max allowable voltage VDC (Max.)	吸合电压 Operate voltage VDC (Max.)	释放电压 Release voltage VDC (Min.)	额定功率 Rated coil power (W)
3	133.3	22.5	额定电压的 of rated voltage 130 %	额定电压的 of rated voltage 75 %	额定电压的 of rated voltage 5 %	约 approx. 0.4
5	80.0	62.5				
6	66.7	90				
9	44.4	202.5				
12	33.3	360				
15	26.7	562.5				
18	22.2	810				
24	16.7	1,440				
36	11.1	3,240				
48	8.3	5,760				


**订货标记示例 ORDERING INFORMATION**

YX301	-S	-1	12	D	M	
触点形式 Contact form:	无-转换 , M-常开 , B-常闭	Nil-Form C , M-Form A , B-Form B				
线圈功耗 Coil power :	L-0.2 W , D-0.4W					
线圈规格 Coil voltage :	03,05,06,09,12,15,18,24,36,48 (VDC)					
触点组数 Number of poles :	1-1组 1-1 Group					
封装形式 Protective construction :	S-塑封式 , SH-防水式 S-Flux proofed , SH-Sealed type					
基本型号 Type designation :	YX301					

**外形尺寸、接线图、安装孔位图 (单位: mm)****OUTLINE DIMENSIONS, WIRING DIAGRAM AND PCB LAYOUT (Unit: mm)**

外形尺寸

Outline Dimensions

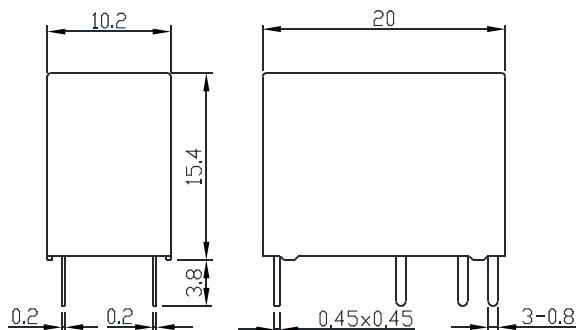

注 Remark :

1.未标注尺寸公差

Unmarked dimensional tolerance


 $\leq 1\text{mm} : \pm 0.2\text{mm}$ ; $(1\sim 5)\text{mm} : \pm 0.3\text{mm}$ ; $\geq 5\text{mm} : \pm 0.4\text{mm}$ .2.安装孔尺寸公差:  $\pm 0.1\text{mm}$ .The tolerance of PCB layout is always:  $\pm 0.1\text{mm}$ .

3.引出脚尺寸为预焊前尺寸.

Extended terminal dimension is dimension before soldering.




安装孔位图 (底视图)

PCB Layout (Bottom View)

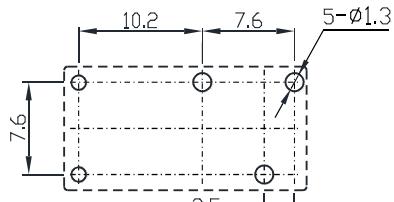

接线图 (底视图)

Wiring Diagram (Bottom View)

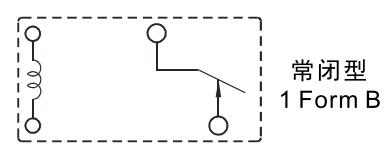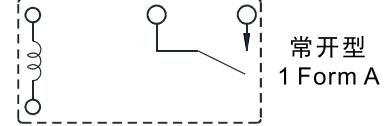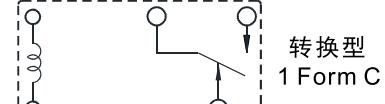

## 性能曲线图 CHARACTERISTIC CURVES

